


NOISE FILTER

N Series 3Ø 500V 보급형 General Type

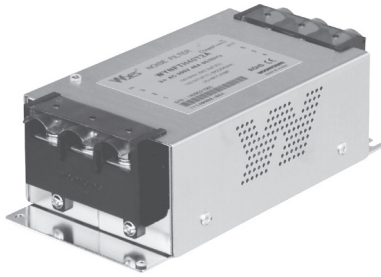

● Features


- Wide Band : High Attenuation
- Band Width : 150KHz~30MHz
- RoHS Compliant
- Inverter Output Type : Model Type"C" (WYNFTH40T2C)

● Specifications


ITEM	MODEL	SYMBOL	WYNFTH40T2A WYNFTH40T2C	WYNFTH50T2A WYNFTH50T2C	WYNFTH60T2A WYNFTH60T2C	WYNFTH80T2A WYNFTH80T2C	WYNFTH100T2A WYNFTH100T2C	WYNFTH120T2A WYNFTH120T2C	WYNFTH150T2A WYNFTH150T2C	WYNFTH200T2A WYNFTH200T2C	WYNFTH250T2A WYNFTH250T2C
Rated Voltage	V		500Vac								
Rated Current	A		40A	50A	60A	80A	100A	120A	150A	200A	250A
Frequency	Hz		50/60								
Dielectric Withstand	V		2500Vac for 1 minute or 2150Vdc for 1 minute								
Insulation Resistance	MΩ		DC 100MΩ at the 500Vdc								
Leakage Current	mA		≤5mA at the 500Vac						≤26mA at the 500Vac		
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-2]								
Operating Humidity	RH		35~85%RH								
Weight	kg		1,2			2,2			2,7		

※ "C" : Inverter Output Type / Derating Curve of page 103

● Circuit Diagram

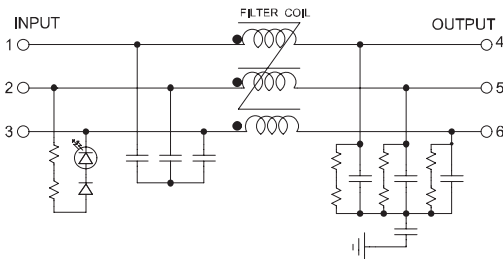


● Terminal




Max 16, Min 6 (40~50A)
Max 23, Min 8 (60~100A)
Max 28, Min 8 (120~250A)


● Characteristics

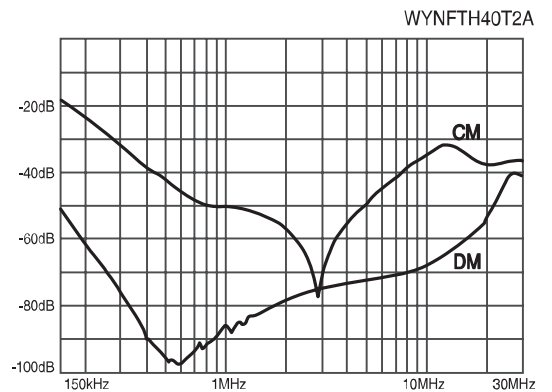

● Dimension

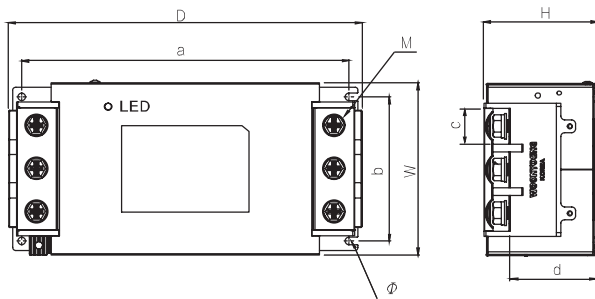









MODEL	W	H	D	a	b	c	d	M	Ø
WYNFTH40~50T2A	91	57.2	184	173.5	74	17	42.3	6	5
WYNFTH60~100T2A	115	75	235.2	218	96	24	58	8	5
WYNFTH120~250T2A	157.2	100.1	347.5	316	130	28.5	68.6	8	6.5

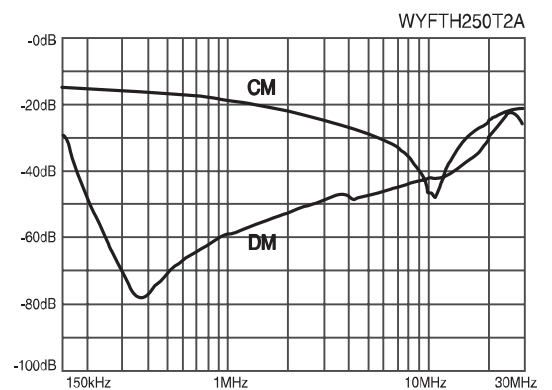

TRANS=NCCT 트랜스폼머
 REACTOR 리액터
 SSR 무정류다이오드
 TPR 전압조정기
 SMP스위칭파워
 NF/노이즈 필터
 H/F 하도널 필터
 SPD 서지보호기
 RELAY 보호계전기
 ELD=GFRL 누전경보기
 ZCT 영상변류기
 METER 판넬메타
 CT=VVT 계기용 변압기
 SHUNT=FAAN 션트판









3Ø 250V Characteristics

● Characteristics

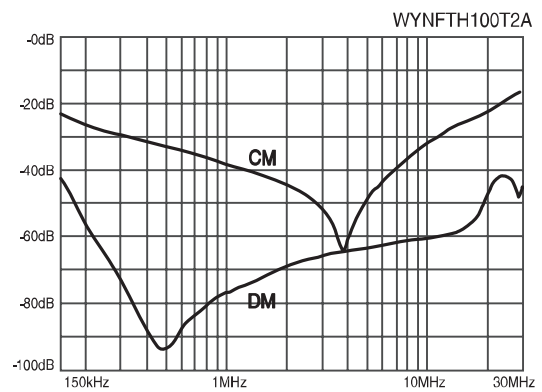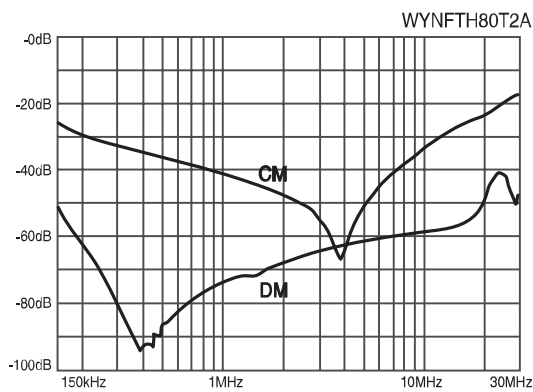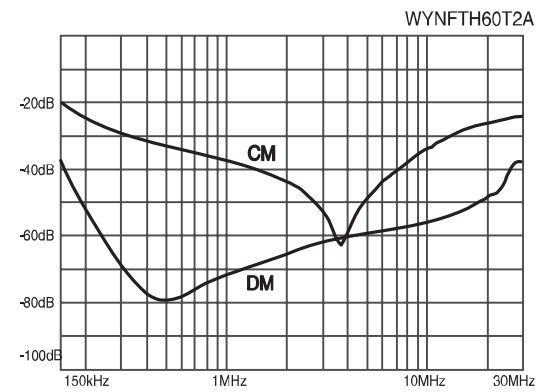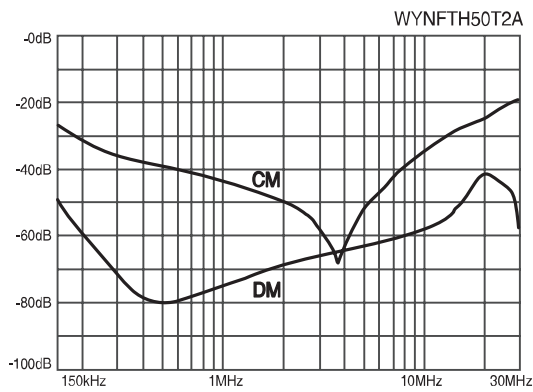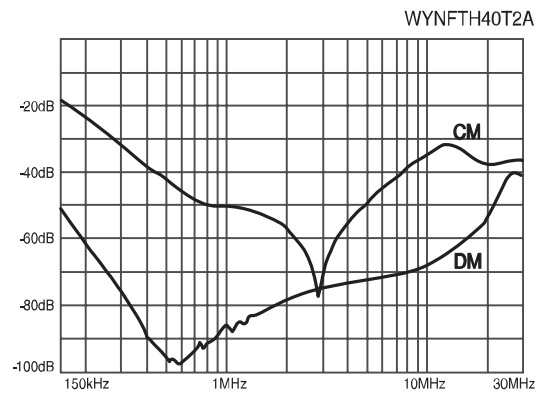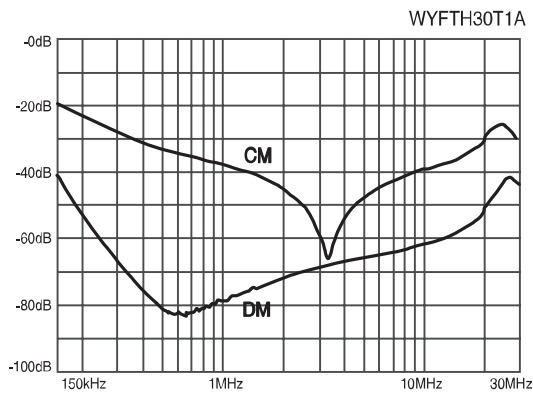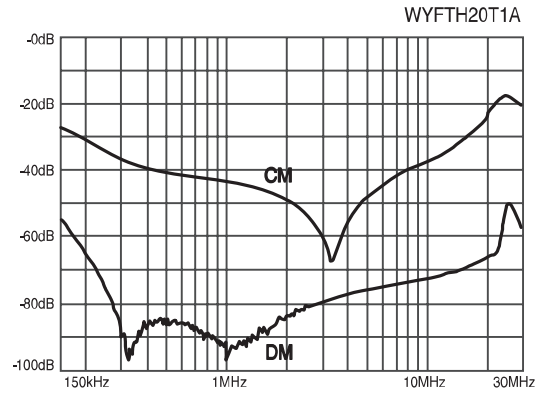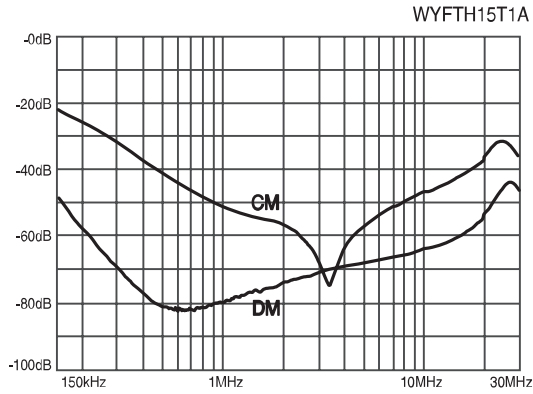

※ CM : Common mode, DM : Differential mode

● Characteristics

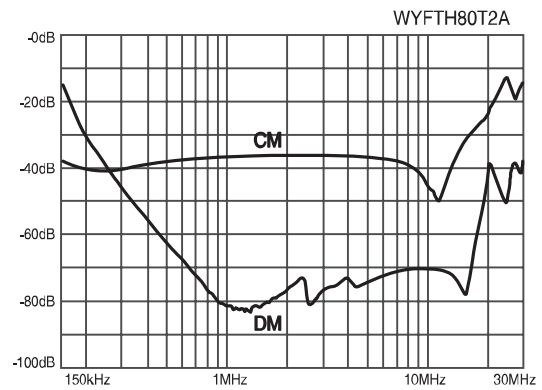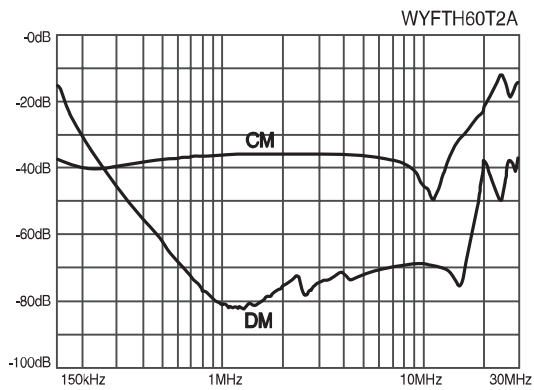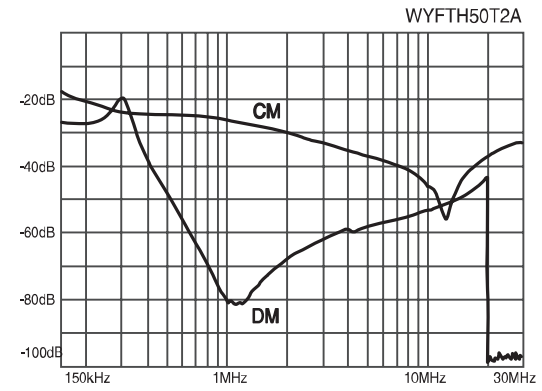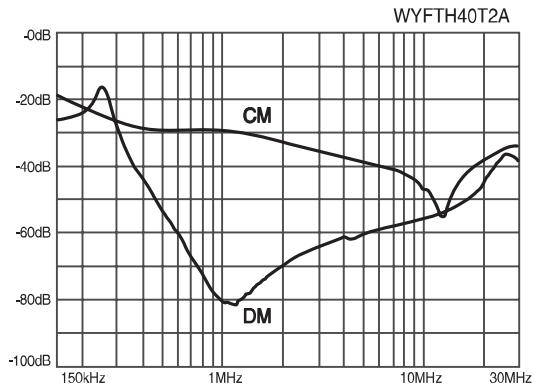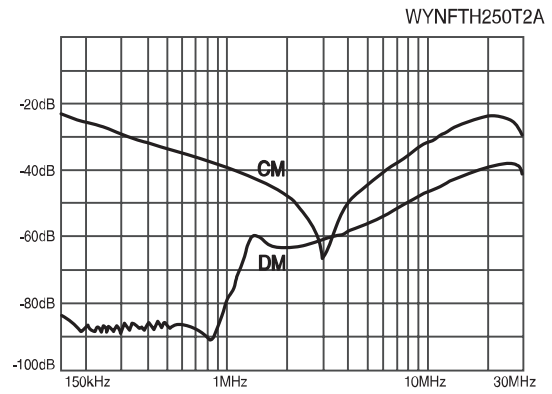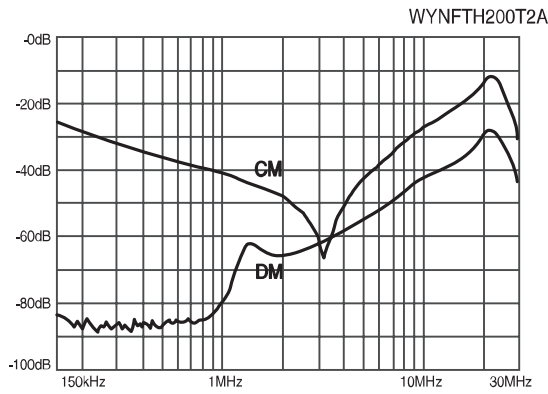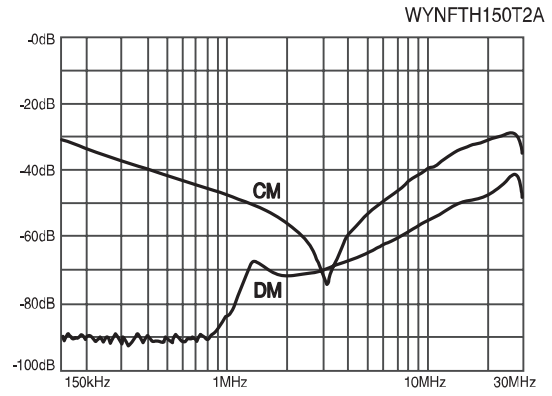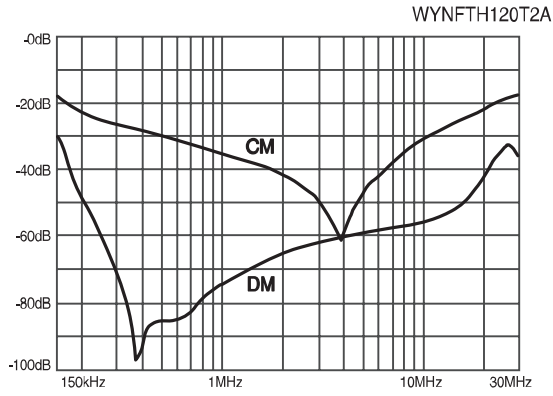

※ CM : Common mode, DM : Differential mode

트랜스포머
REACTOR
리액터
무정전압블레이
SSR
전압조정기
TPR
스위칭파워
SMP
노이즈필터
H/F
하모닉필터
SPD
서지보호기
RELAY
보통계전기
ELD=GF
누전경보기
ZCT
영상변류기
METER
판넬메타
CT=VT
계기용변성기
SHUNT=FA
센트팬